




નં. સા.ઈ.ઝોન/આઉટવર્ડ/ ૨૦૨૯
તારીખ : ૦૮ / ૦૬ / ૨૦૨૩

પ્રતિ,



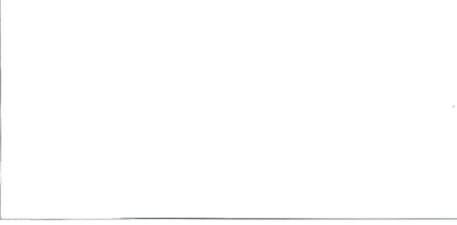

વિષય :- સાઉથ ઈસ્ટ ઝોન(લિંબાયત)માં આવેલ વિવિધ સુરત મહાનગરપાલિકા હસ્તકની મિલ્કતોમાં ઉધઈ ટ્રીટમેન્ટ કરવાનું કામ.

સંદર્ભ :- મા.એડી. સીટી ઈજનેરશ્રીની તા.૧૦/૦૫/૨૦૨૩ ની મંજૂરી.

મહાશય,

ઉપરોક્ત વિષય સંદર્ભમાં જણાવેલ કામે ઉધઈ ટ્રીટમેન્ટ કરાવવાના કામે ઈચ્છુક ઈજારદારે આ સાથે સામેલ ભાવપત્રકમાં યોગ્ય ભાવ ભરી રૂ.૫,૦૦૦.૦૦ EMD સહિતનું ભાવપત્રક સીલબંધ કવરમાં તા.૧૮/૦૬/૨૦૨૩ સુધીમાં નીચે સહી કરનારને મોકલવા ઘટતુ કરશો.


કાર્યપાલક ઈજનેર
સાઉથ ઈસ્ટ ઝોન(લિંબાયત)
સુરત મહાનગરપાલિકા


Surat Municipal Corporation
South East Zone (Limbayat)
Housing Department



Name Of Work :- Providing Anti termite Treatment Service in Various Municipal Buildings in South East Zone (Limbayat), Surat.

Quotation

Item NO.	Description	S.O.R 2021-2022			
		Qty.	Rate	Unit	Amount
1	Carring out plinth treatment to post construction / existing structure by spraying chemical solution for termite control treatment including labour and material consistment with ISI specification. Using Chlordene and Chiorpurfiles 20 EC. As per 6131_paret-II Consentration Weight one percent is recommended i.e. one litre 20 EC chemical emulsion with 19 liter give 1% concentration inclusive of one litre chemical emulsion appication at the rate of 5 litre chemical / Sqm of surface is recommended as per IS.	1,25,000.00		Sqft.	
Total Rs.					

-SD-

South East Zone (Limbayat)
Surat Municipal Corporation

Specification & Work Conditions

- 1.0 Materials: The chemicals used for the soil treatment shall be only one of the following with concentration shown against each in aqueous emulsion. Chemicals Concentration 1. Aldrin 0.50% (by weight) 2. Heptachlor 0.50% (by weight) 3. Chlordane 1.00% (by weight)
- 2.0. Workmanship
 - 2.1. The chemicals barrier shall be complete and continuous under whole of the structure to be protected.
 - 2.2. The bottom and the sides of foundations up to a height of 30 cms from the bottom of excavation made for masonry foundation and for basement column pits shall be treated with the chemical emulsion at the rate 5 liters/ sqmt of the surface area. .
 - 2.3. The chemical treatment shall be-carried out when the surfaces is quite dry. Chemical treatment shall not be carried out when it is raining or when the soil wet with rain or sub soil water.
 - 2.4. Once formed, treated soil berries shall be not disturbed. If by chance, treated soil barriers are disturbed, immediate steps shall be taken to restore the continuation and compactness of the barrier system
 - 2.5. The treatment against termite infection shall remain fully effective for a period not less than 05 years from date of issue of the final certificate to completion of work. If at any time during this period, any defects in treatment are revealed or any evidence of infection in any part of the building or structure is noticed, the contractor shall be rectify the concerned defects within 14 days on receipt of notice from Engineer-in-charge. On contractor's failure to do so, the Engineer-in-charge may get the same rectified through any other agency at contractor's risk and cost, and decision of Engineer-in-charge as to the cost payable by contractor for the same shall be final and binding to the contractor.
 - 2.6. A guarantee bond on appropriately stamped paper shall be given by the contractor to the department in the manner and form prescribed below: FORM OF GUARANTEE BOND I/We
(Contractor) hereby guarantee that work will remain unaffected and will not be any way dam+B17aged by termite or any other germs of similar types, for a period for 05 years after completion of the work of anti-termite as per the terms and conditions of the contract and or damage that might be caused on account of termite and or other similar type of germs and hereby Guarantees to make good any loss of damages suffered by the Government of Gujarat and further guarantee to redo effective work without claiming any extra cost.
 - 2.7. This guarantee shall remain in force for the period of 05 years from the completion of the work under the contract and it shall remain binding to the contractor for period of 05 years.
- 3.0. Mode of measurements & payment
 - 3.1. The length and breadth shall be measured correct to a Ft. as per the dimensions of sanctioned plans. No deduction shall be made nor extra paid for any opening for pipes etc. up to 1.0 sqft. The rate shall include the cost of all labor and materials required for the operation involved for satisfactory completion of this item. The sides of the trenches 12 in., each side and bottom shall be measured under this item.
 - 3.2. The rate shall be for a unit of One square foot.
- 4.0. Quotation Fee & Security Deposit
 - 4.1. Quotation documents fees of Rs. 5,000.00/- per set which is required for submission of tender towards the cost of Quotation documents in pay order or by demand draft of any nationalized bank, in favor of "Commissioner, Surat Municipal Corporation, Surat" payable at Surat and shall be submitted along with EMD and other documents. The cost of the Quotation Documents will not be refunded in any circumstances. Surat Municipal Corporation shall not be liable for any postal delay in any case.
 - 4.2. The successful quotationer will be required to furnish a performance bond (Security Deposit) of an amount equal to 2.0% (One percent) of the quotationed amount.

-SD-

**South East Zone (Limbayat)
Surat Municipal Corporation**