



**SURAT MUNICIPAL MCORPORATION
HYDRAULIC DEPARTMENT
QUOTATION/CONSENT FORM**

QUOTATION/CONSENT NO. DMC /HYD/4/2025-26, DATE:01/08/2025		
CONSENT FOR CONSTRUCTION OF NEW VALVE CHAMBER AND REPAIRING OF EXISTING VALVE CHAMBER AT VARIOUS LOCATION IN WEST(RANDER) ZONE,SURAT.		
ESTIMATED AMOUNT: Rs.24,94,237.99		EMD AMOUNT: Rs.25,000.00
Validity Period : 120 Days		Agency Category : “E-1” Class & Experiecnd
Required Documents		
1	Solvency Certificate	Yes
2	Registration certificate	Yes
3	GST Registration Certificate	Yes
4	Experiance Certificate	Yes
5	Last Three Year Annual Turnover	Yes
6	Pan Card	
CONSENT AVAILIBILITY		
ISSUING AUTHORITY		Hydraulic Engineer, Hydraulic Department, Surat
ISSUING OFFICE		Administrative office, Hydraulic Department,1st Floor, Althan Swimming pool, Opp.DRB College, Althan, Surat.
INVITING AUTHORITY		Hydraulic Engineer, Engineer, Hydraulic Department, Surat
Last Date of Submission		Date: 21/08/2025, Time up to 18:00 P.M.
SUBMITTED To,		Hydraulic Engineer Hydraulic Department,1st Floor, Althan Swimming pool, Opp.DRB College, Althan, Surat.
SIGNATURE OF ISSUING AUTHORITY		
-SD- HYDRAULIC ENGINEER SURAT MUNICIPAL CORPORATION		

હાઈડ્રોલિક ઈજનેર

અલથાણા સ્વીમીંગપુલ એન્ડ યુથ એમ્પાવરમેન્ટ
સેન્ટર, પહેલા માળે, સી.બી.પટેલ સ્પોર્ટ્સ
કોમ્પ્લેક્ષની સામે, નેસ્ટ હાઉસની બાજુમાં, અલથાણા,
સુરત-૩૮૫ ૦૧૭.



e-mail: exen.hydraulic@suratmunicipal.org

—: સંમતિ પત્ર :—

પ્રતિ,

એચઈડી/આ./નં. ૧૮૬૭

તા.૦૫/૦૮/૨૦૨૫

.....
.....
.....
.....

વિષય :- સુરત મહાનગરપાલિકાના વેસ્ટ(રાંદેર)ઝોન વિસ્તારમાં નવા વાલ્વ ચેમ્બર બનાવવા તથા જુના વાલ્વ ચેમ્બરના રીપેરીંગની કામગીરી કરવાનું કામ.

સંદર્ભ :- (૧) સ્થાયી સમિતિ ઠરાવ નં.૨૦૮૫/૨૦૨૨, તા.૧૫/૧૨/૨૦૨૨ થી મંજૂર થયેલ યુનિટ રેઈટનાં ભાવો અને શરતો ને આધિન.
(૨) મે.ડે.મ્યુ.કમિશનરશ્રીની તા.૩૦/૦૭/૨૦૨૫ ની મંજૂરી.

મહાશય,

જય ભારત સાથે જણાવવાનું કે, સુરત મહાનગરપાલિકાના વેસ્ટ(રાંદેર)ઝોન વિસ્તારમાં નવા વાલ્વ ચેમ્બર બનાવવા તથા જુના વાલ્વ ચેમ્બરના રીપેરીંગની કામગીરી કરવાના કામે સ્થાયી સમિતિ ઠરાવ નં.૨૦૮૫/૨૦૨૨, તા.૧૫/૧૨/૨૦૨૨ થી મંજૂર થયેલ યુનિટ રેટના ભાવો અને શરતોને આધિન રૂ.૨૪,૮૪,૨૩૭-૮૮ પૈ. (જી.એસ.ટી સહિત) ની મર્યાદામાં વિષયોક્ત કામગીરી કરવા તમો સંમત હોવ, તો આપની લેખિત સંમતિ બંધ કવરમાં તા.૨૧/૦૮/૨૦૨૫ સુધીમાં હાઈડ્રોલિક વિભાગ ખાતે મોકલી આપવાની રહેશે. ઉપરોક્ત જણાવેલ તારીખ પછી કોઈ બંધ કવરો સ્વીકારવામાં આવશે નહીં.

—: શરતો :—

૧. અર્નેસ્ટમની ડીપોઝીટ(ઈએમડી)ની રકમ કમિશનરશ્રી, સુરત મહાનગરપાલિકાના નામનો સુરતની રાષ્ટ્રીયકૃત શીડયુલ બેંકના ડીમાન્ડ ડ્રફ્ટ / પે. ઓર્ડરથી સંમતિપત્રક સાથે રૂ. ૨૫,૦૦૦/- ની આપવાની રહેશે.
૨. ઈજારદારે 'ઈ-૧ વર્ગ કે તેથી વધુનું' રજીસ્ટ્રેશન સર્ટીફિકેટની પ્રમાણીત નકલ સંમતિપત્રક સાથે આપવાની રહેશે.
૩. ઈજારદારે અંદાજીત રકમના ૨૦% એટલે કે રૂ. ૫,૦૦,૦૦૦/- કે તેથી વધુ રકમની વર્તમાન(ચાલુ) વર્ષની રાષ્ટ્રીયકૃત બેંકની સોલવંશી સર્ટીફિકેટ સંમતિપત્રક સાથે આપવાની રહેશે.
૪. ઈજારદારે પૂર્ણ કરેલ કામના/અનુભવના સર્ટીફિકેટ (Form 3A)ની પ્રમાણીત નકલ સંમતિપત્રક સાથે આપવાની રહેશે એટલે કે(અ) અંદાજીત રકમના ૪૦% રકમના ૦૩(ત્રણ) કામો, અથવા (બ) અંદાજીત રકમના ૫૦% રકમના ૦૨(બે) કામો, અથવા (ક) અંદાજીત રકમના ૮૦% રકમના ૦૧(એક) કામ ની જરૂરીયાત રહે છે.

૫. ઈજારદારે છેલ્લા ૦૩(ત્રણ) વર્ષના આઈ. ટી. રીટર્ન અને નાણાંકીય ટર્ન ઓવર C.A.ના સર્ટીફિકેટ સહિત સંમતિપત્રક સાથે આપવાના રહેશે.
૬. ઈજારદારે GST રજીસ્ટ્રેશન સર્ટીફિકેટની પ્રમાણીત નકલ સંમતિપત્રક સાથે આપવાની રહેશે.
૭. ઈજારદારે પાન કાર્ડ સંમતિપત્રક સાથે રજુ કરવાનું રહેશે.
૮. ઈજારદાર મંજૂર યુનિટ રેઈટના શીડ્યુલ-બી માં જણાવેલ ભાવ, લાગુ ઠરાવ અને ટેન્ડરની શરતોને બંધનકર્તા રહેશે.
૯. કોઈપણ અથવા બધા જ સંમતિપત્રકો રદ કરવાનો અધિકાર સુરત મહાનગરપાલિકાને અબાધિત રહેશે તે અંગે કોઈપણ કારણો આપવામાં આવશે નહીં.
૧૦. તમામ પ્રકારના વેરા ઈજારદારે ભોગવવાના રહેશે.
૧૧. આવેલા સંમતિપત્રકો પૈકી સંમતિપત્રક મંજૂર કરવાની સત્તા સુરત મહાનગરપાલિકાના સક્ષમ સત્તાધીશશ્રીની રહેશે.
૧૨. તમામ સરકારી / અર્ધ સરકારી લાગુ પડતા કાયદાનું ઈજારદારે પાલન કરવાનું રહેશે.
૧૩. સદર કામગીરી બાબતે અત્રેના વિભાગના સંબંધિત આસી./જુની. ઈજનેર/ડેપ્યુટી ઈજનેરશ્રીનો સંપર્ક કરવો.
૧૪. સદર કામગીરી ઉક્ત મંજૂર થયેલ ટેન્ડરના Detailed Technical Specification મુજબ કરવાની રહેશે.
૧૫. સંમતિપત્રક સાથે માંગ્યા મુજબની વિગતો રજુ નહીં કર્યેથી સંમતિપત્રક રદ ગણવામાં આવશે.

-SD-
હાઈડ્રોલિક ઈજનેર
સુરત મહાનગરપાલિકા

बहजनहिताय बहजनसुखाय

SURAT MUNICIPAL CORPORATION
HYDRAULIC DEPARTMENT




NAME OF WORK :- Construction of New Valve Chamber and Repairing of Existing Valve Chamber at various location in West (Rander) Zone, Surat.

SCHEDULE-B

ITEM NO	DESCRIPTION	QTY	RATE		UNIT	AMOUNT	
			Rs.	Ps.		Rs.	Ps.
1	Excavation for Foundation including all safety provision (barricadding, fencing, reflective Cautionary Warning Sign Board of work in progress etc.) using site rails with shoring, strutting and stacking the excavated stuff upto 50.00 mt.complete for lift and strata as specified. The excavation shall be carried out in stable slope for which no extra payment will be made. complete as directed by the Engineer-in-charge. (R &B SOR 2021-22 Page No. 64)						
	(A) 0.00 to 1.50 mt. depth	700.00	77.30		CM	54110.00	
	(B) 1.5 to 3.00 mt. depth	700.00	85.79		CM	60053.00	
	(C) 3.00 to 4.5 mt. & all above Depth.	200.00	94.07		CM	18814.00	
2	Excavation of asphalt road or any kind of pavement of any thickness with stacking the same etc. completed as directed. (GWSSB SOR 2021-22 Page No. 33)	500.00	305.90		CM	152950.00	
3	Refilling of trenches including ramming, watering, consolidating. disposal of surplus stuff as directed within a radius of 3 km. (GWSSB SOR 2021-22 Page No. 40)	900.00	27.60		CM	24840.00	
4	Providing and laying C.C 1:3:6 (1- cement :3- coarse sand : 6- graded stone aggregate of 40 mm nominal size)and curing , compacting including cost of form work for P.C.C.(A) pipe encasing/thrust block,(B) for foundation And plinth (GWSSB SOR 2021-22, Part-1 C1, It. 2.1)	80.00	4275.00		CM	342000.00	
5	Providing and constructing brick work using common burnt clay Fly Ash building bricks confirming to IS:13757 ,IS:5454 ,IS:3495 having crushing strength not less than 35Kg/Sq.cm. brick masonry as per the detailed drawing using brick of approved quality in foundation and plinth incl. racking out joints, watering etc. as directed in CM 1:6 (1 Cement:6 coarse sand) (R&B SOR 2021-22 Page No. 84)	120.00	3206.35		CM	384762.00	

6	Providing and applying 10 mm thick cement plaster in single coat on brick / concrete walls similar surface for plastering and finished even and smooth with a floating coat of neat cement slurry mixed with admixture of lime required proportion etc. complete.(R&B SOR 2021-22 Page No. 142)	500.00	107.65	SM	53825.00
7	Providing and laying Cement concrete 1:1.5:3 (I.e in proportion of CM 1:1.5:3 (1- cement : 1.5 -fine Agg.and 3- 20 mm nominal size kapachi) including cost of form work but excluding cost of reinforcement including curing etc. complete. (GWSSB SOR 2021-22 Page No. 43)				
	(A) Foundation, Footing, Base of Columns and mass concrete	50.00	5610.00	CM	280500.00
	(B) Slabs	50.00	6967.00	CM	348350.00
8	Providing, Cleaning straightening, Cutting, bending binding in position TMT bar for Reinforced concrete work confirming to IS 1786 and Mild steel reinforcement confirming to IS 226 (GWSSB SOR 2021-22, Part-1 C1, It. 9.4)	3000.00	77.705	KG	233115.00
9	Providing and fixing C.I \PVC steps of size 300 x 150 x 25 mm in the masnory chamber.The steps shall be fixed at the time of constructing the chamber. (R&B SOR 2021-22 Page No. 180)	100.00	194.07	No	19407.00
10	Providing & fixing R.C.C.Precast Manhole Frame with cover in M-350 as per drawing for Manhole suitable for 450x600 cm opening of M.H. including cost of reinforcement M.S. Angles or Flate, curring mold work etc.complete. (GWSSB SOR 2021-22, Page No 16, It. 10.4.A)	70.00	2569.00	No	179830.00
11	Providing and fixing M.S manhole frame and cover of required size including necessary hold fast arrangement. The frame shall be grouted in the RCC slab at the time of casting the slab including one coat of primer and two coat of oil paint. The frame shall be of M.S. angle of size 65X65X6 mm & 12 mm thick M.S. plate as directed by Engineer-in-charge. (SMC Unit Rate)	300.00	60.89	KG	18267.00
12	Bailing out subsoil or drainage water by pumps as directed after excavation and during concreting / pipe laying work and keeping dry the area till the complete of work as per information given by the Engineer-in-charge. (SMC Unit Rate)	10.00	18.28	HP/HR	182.80

13	Taking colour photographs of work in progress and submit with each R.A.Bill. Photographs shall cover details of locations of the activity of work in progress. The Contractor shall submit photographs with Album in a set comprising 3 (three) copies (size of photograph is 4" x 6") and a soft copy of the same. Work shall be carried out as per the instruction of the Engineer-in-charge.(SMC Unit Rate)	30.00	30.00	Set	900.00
TOTAL AMOUNT RS.					2173249.10
As Per Std. Comm. Res. No.2095/2022, Dt.15/12/2022 Unit Rate Above 14.77 % Rs:-					320988.89
Total Amount Rs:-					2494237.99

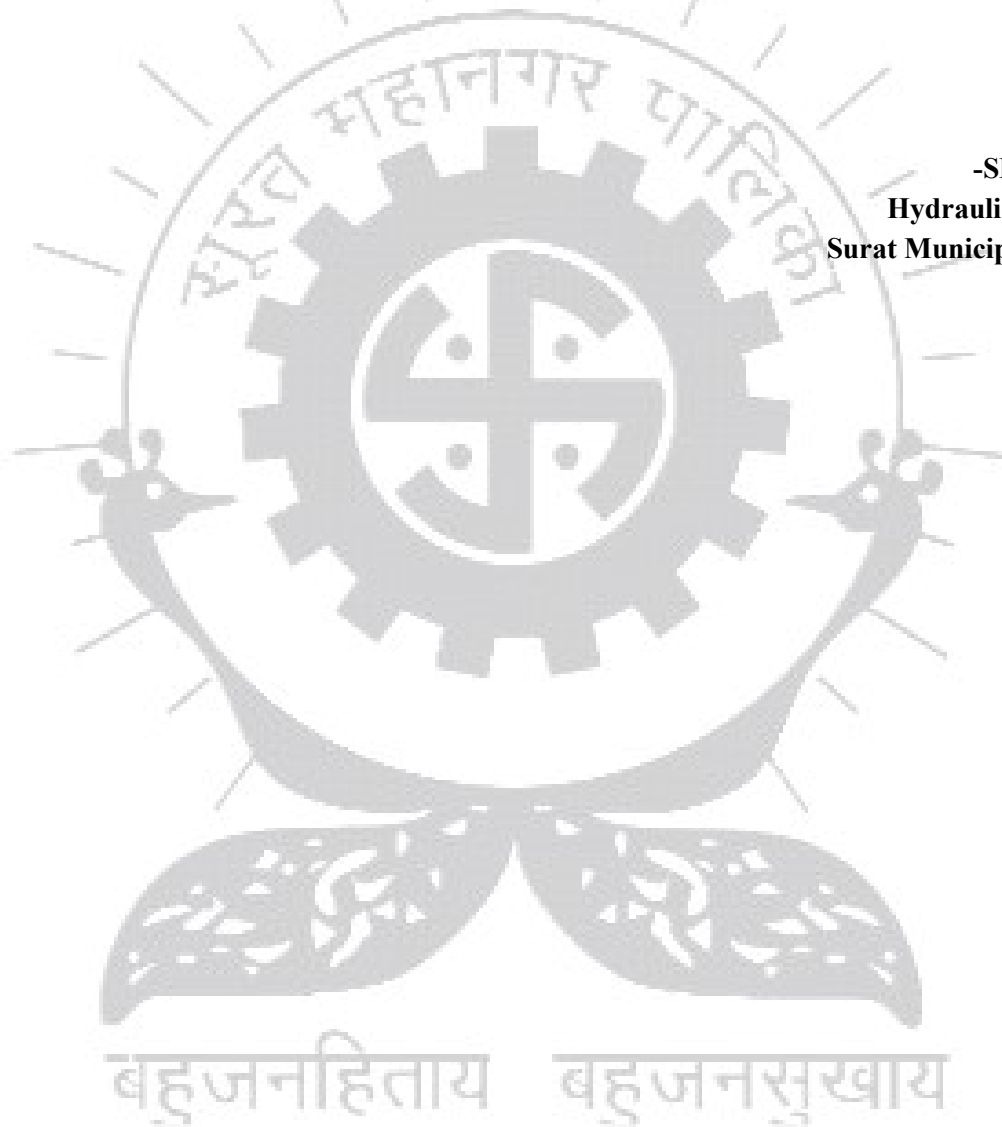

-SD-
Hydraulic Engineer
Surat Municipal Corporation

સુરત મહાનગરપાલિકાની સ્થાયી સમિતિની તા.૧૫-૧૨-૨૦૨૨ ના
રોજ મળેલ સભામાં નીચે મુજબનો ઠરાવ પસાર થયો હતો :-

મ્યુ.કમિશનરશ્રીના તા.૧૨-૧૨-૨૦૨૨ ના પત્ર નં.સી.સ્થા.સ./૧૦૨૭ થી વિદિત થઈ,
સુરત મહાનગરપાલિકાના તમામ ઝોન વિસ્તારમાં પાણી પુરવઠાની નળીકા ઉપર મુકવામાં
આવેલ વાલ્વના ઓપરેશન માટે બનાવવામાં આવેલ વાલ્વ ચેમ્બરના રીપેરીંગ તથા નવા વાલ્વ
ચેમ્બર બનાવવાના કામે ટેન્ડર નોટીસ પ્રસિધ્ધ કરી માંગવામાં આવેલ ટેન્ડરોના સંદર્ભમાં નિયત
સમયમર્યાદામાં આવેલ કુલ-૬ ટેન્ડરો પૈકી ક્વોલીફાઈડ થયેલ એકમાત્ર ટેન્ડરના ટેન્ડર
હિતેશ જયંતિભાઈ પટેલ, સુરતનું ટેન્ડરની અંદાજી રકમ રૂ.૨૦,૧૪,૧૧૫-૩૫ થી
૧૪.૭૭% ઉચ્ચ એટલે કે રૂ.૨૩,૧૧,૬૦૦-૧૮ નું ટેન્ડર, તેઓએ તેમના તા.૮-૧૨-૨૦૨૨
ના પત્રથી હાઈડ્રોલિક ઈજનેરશ્રીને ઉદ્દેશીને આપેલ લેખિત સંમતિ તેમજ ટેન્ડરની શરતો અને
સ્પેસીફિકેશનને આધિન વ્યાજબી જણાતું હોય મંજૂર કરવાનું તથા તેઓ સાથે કરારનામું કરવા
મ્યુ.કમિશનરશ્રીને અધિકૃત કરવાનું તેમજ સદર ભાવને "યુનિટ રેઈટ" તરીકે ૨ (બે) વર્ષ માટે
અથવા નવા યુનિટ રેઈટ મંજૂર ન થાય ત્યાં સુધી "યુનિટ રેઈટ" તરીકે મંજૂર રાખવાનું તથા
જે-તે સમયે આ પ્રકારની કામગીરી કરતા અનુભવી ઈજારદાર સંમતિ આપે તો તેઓને જે-તે
સક્ષમ સત્તાની મંજૂરી મેળવી કામગીરી સોંપવાનું ઠરાવવામાં આવે છે.

ઠરાવ નં.૨૦૮૫/૨૦૨૨ સર્વાનુમતે મંજૂર.

સ.ર.મ્યુ.કમિશનરશ્રી પ્રતિ,

Received On

Dt. 16-12-22

નં. સી.સ્થા.સ./૧૩૪૮

તા. 16/12/2022

AE (RAC) W/OS

HDP.

HP/16/12/22

HCOS

મ્યુ.સેક્રેટરી,
સુરત મહાનગરપાલિકા
તા. 16-12-2022.

સુરત મહાનગરપાલિકા
તા. 16/12/22

ઠરાવ રજીસ્ટર પાના નં. 44
નોંધણી 43
ઠરાવ મળ્યાની તારીખ 20-12-22

Ex Engr (HYD)


DECTO

ME



20/12

600mmX450mm CHAMBER DETAIL

SCALE :- N.T.S.

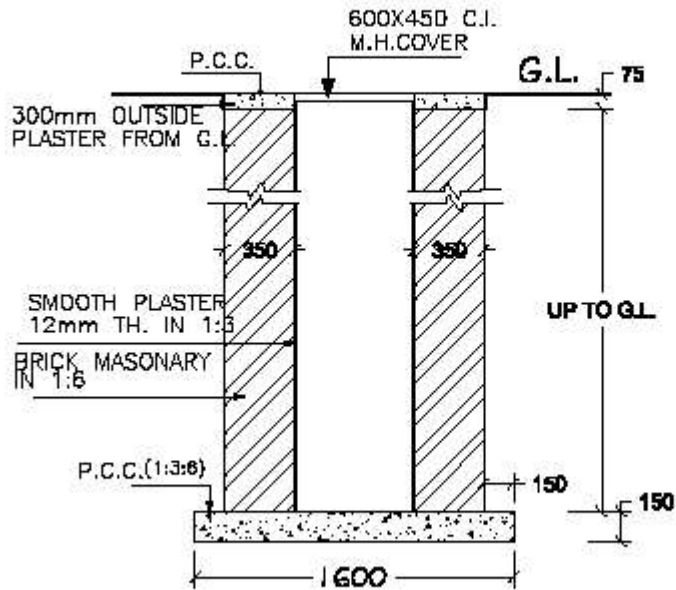

SECTION AA

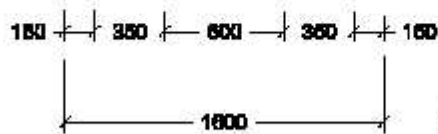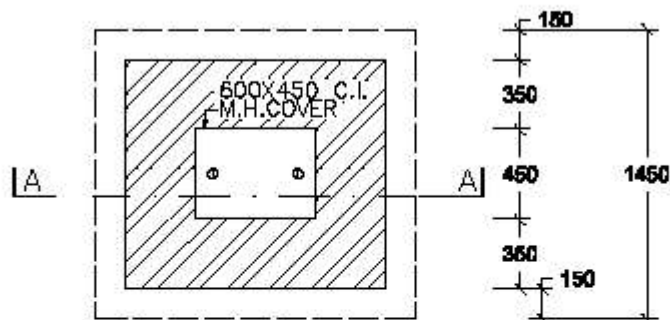

PALN



NOTE :-
ALL DIMENSIONS ARE IN MM

HYDRAULIC ENGINEER
HYDRAULIC DEPARTMENT
SURAT MUNICIPAL CORPORATION

DRAWING :-01

PROTECTION CHAMBER OF WATER RECHARGING BORE **1000mmX1000mm CHAMBER**

SCALE=1:25

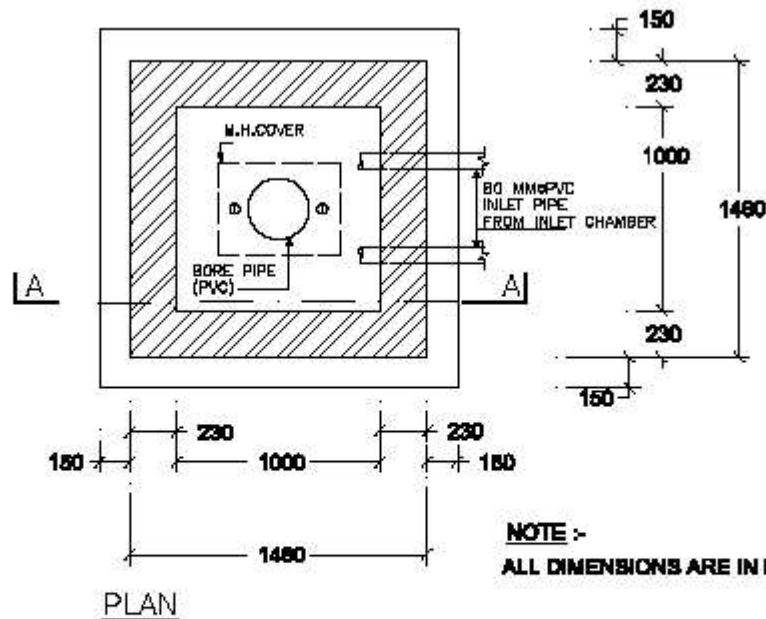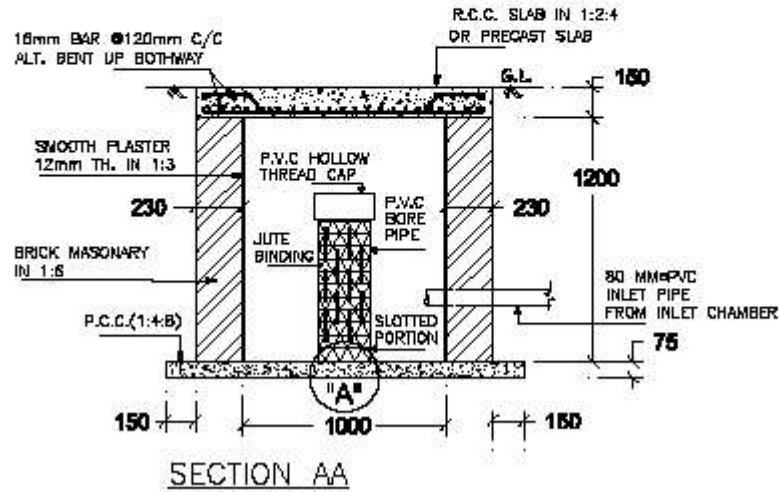


NOTE :-
ALL DIMENSIONS ARE IN MM

HYDRAULIC ENGINEER
 HYDRAULIC DEPARTMENT
 SURAT MUNICIPAL CORPORATION



1200mmX1200mm CHAMBER DETAIL

18mm ϕ TOR STEEL BAR 120mm C/C
ALT.BENT UP BOTHWAY

SCALE 1:30

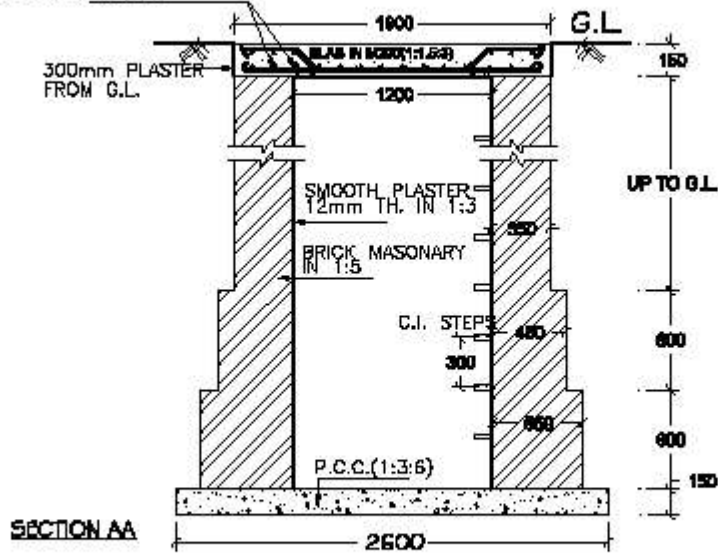

18mm ϕ TOR BAR
120mm C/C ALT.BENT
BOTHWAY

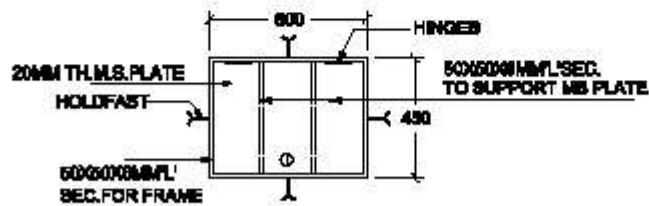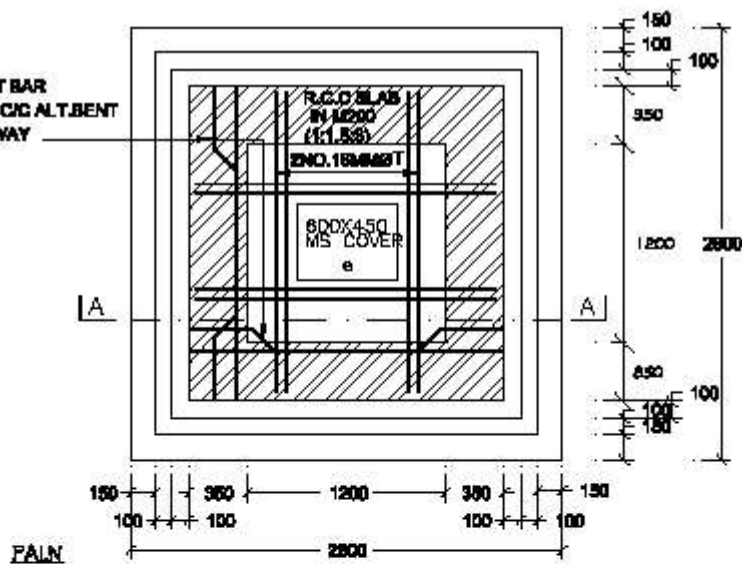





MS COVER DETAIL

HYDRAULIC ENGINEER
HYDRAULIC DEPARTMENT
SURAT MUNICIPAL CORPORATION

18mm ϕ BAR 125mm C/C
ALT. BENT UP BOTH WAY

1800X1800 CHAMBER DETAIL

SCALE 1:50

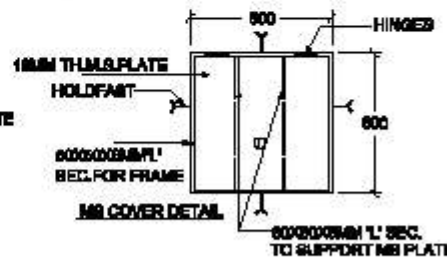
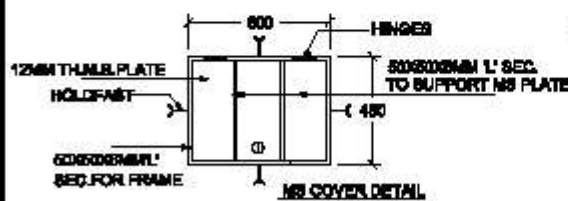
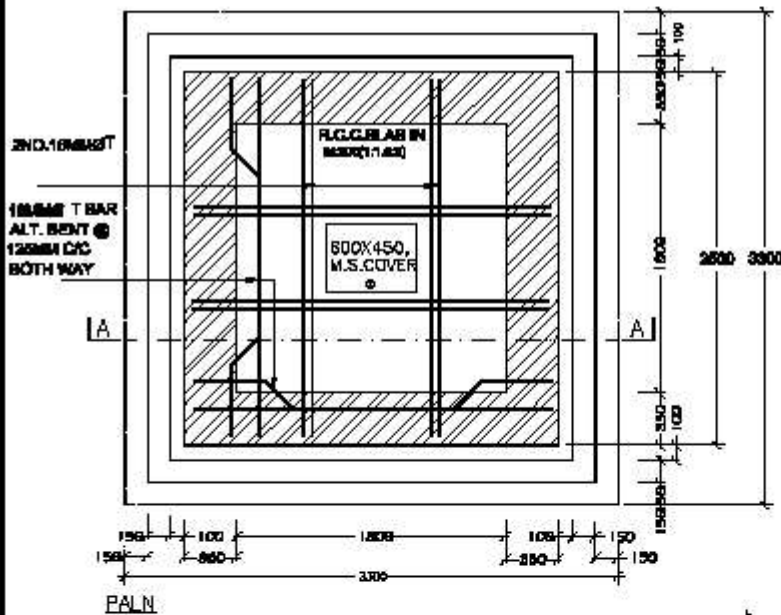
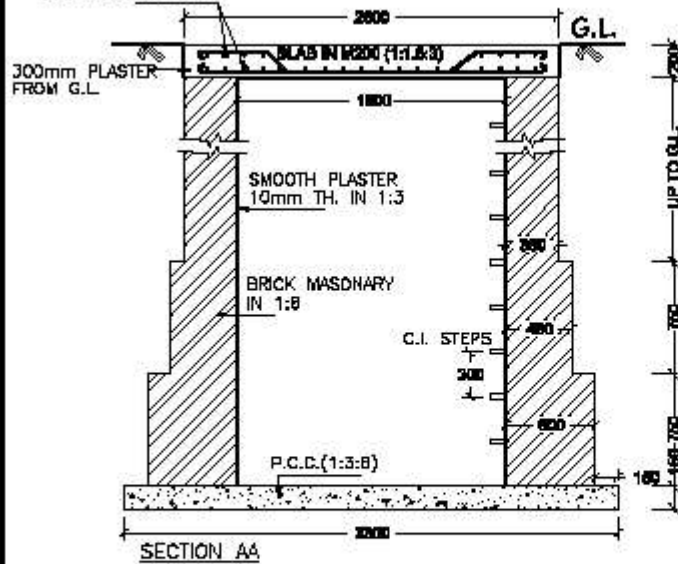


HYDRAULIC ENGINEER
HYDRAULIC DEPARTMENT
SURAT MUNICIPAL CORPORATION


10mm BAR @150mm C/C
ALT. BENT UP BOTH-WAY

2400mmX2400mm CHAMBER DETAIL


SCALE 1:35
ALL DIMENSIONS IN MM

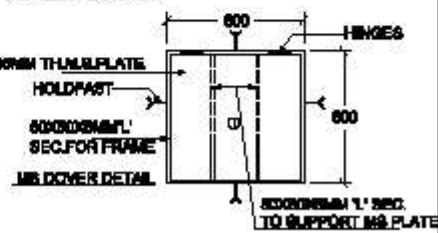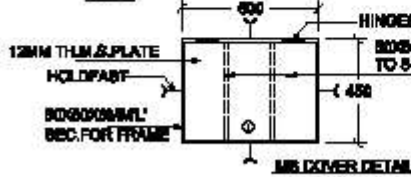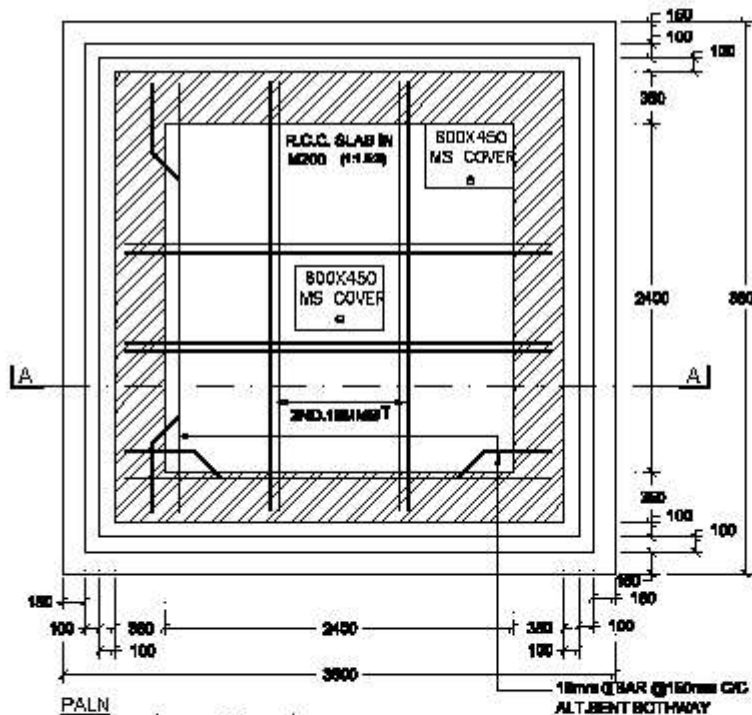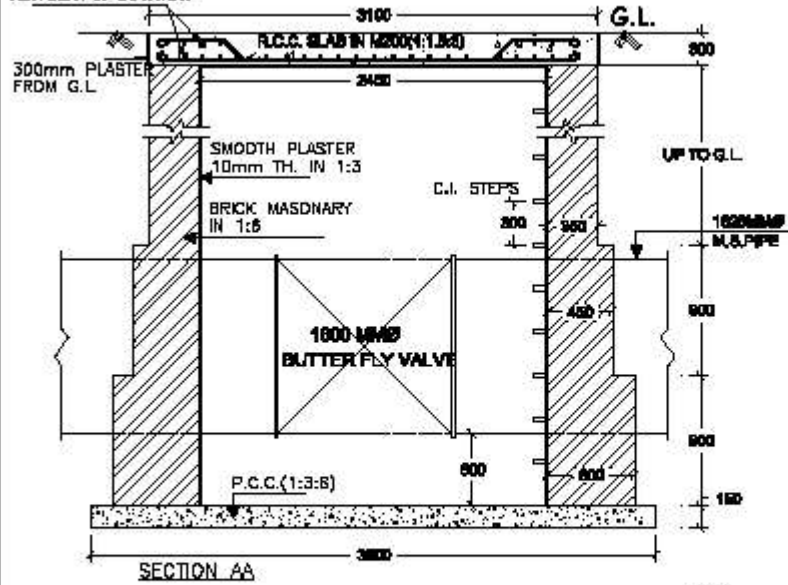

HYDRAULIC ENGINEER
HYDRAULIC DEPARTMENT
SURAT MUNICIPAL CORPORATION

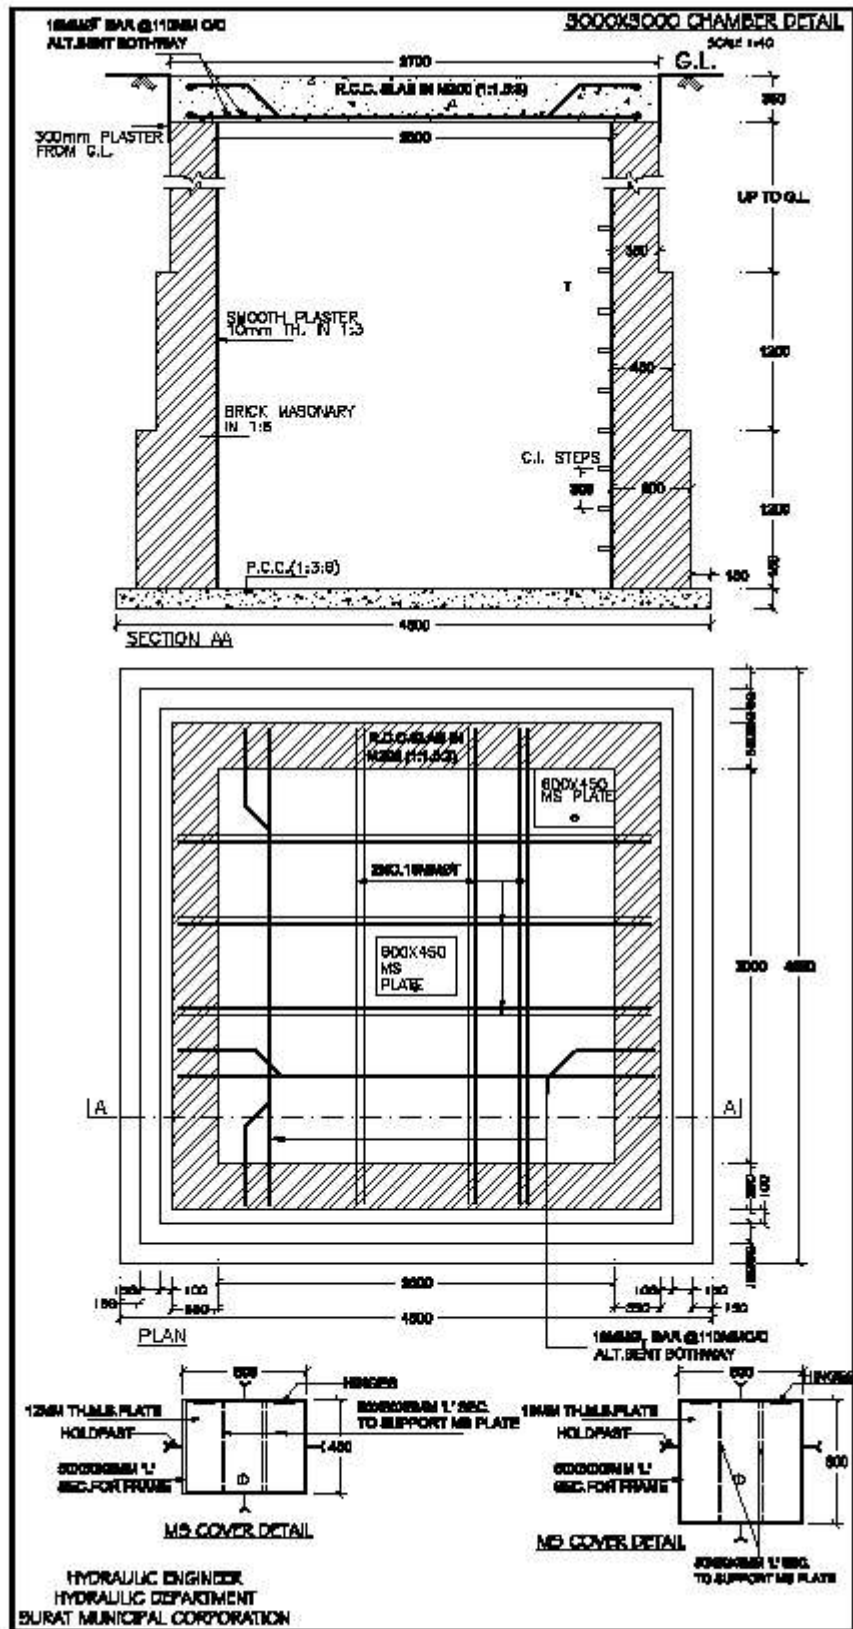


DRAWING OF M.S. FRAME & COVER

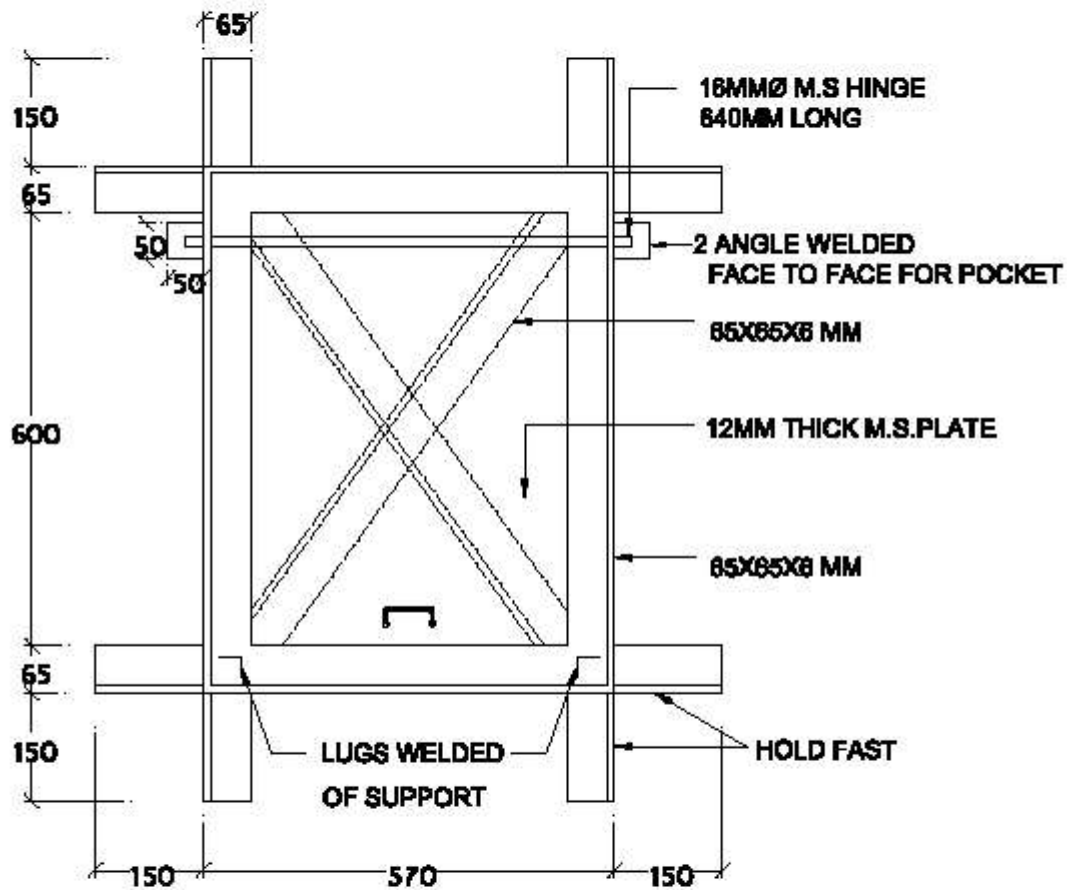


ALL DIMENSIONS ARE IN MM
CLEAR OPENING SIZE 450X800

HYDRAULIC ENGINEER
SURAT MUNICIPAL CORPORATION

DETAILS OF R.C.C. PRECAST COVER

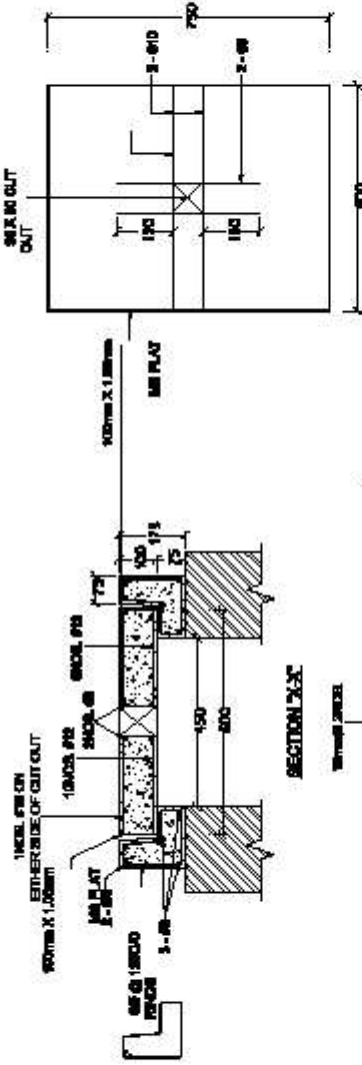

SECTION X-X

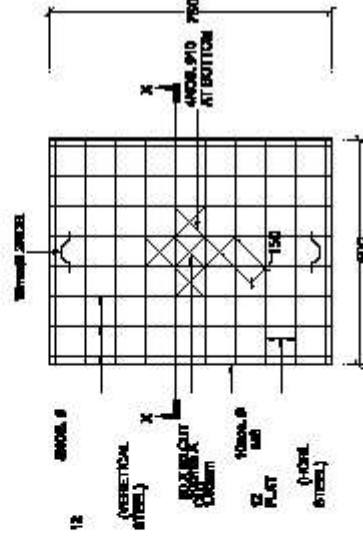

PLAN OF VALVE CHAMBER COVER


PLAN OF REIN. AT TOP
(FOR VALVE CHAMBER COVER)

REINFORCEMENT NOTE


- (01) ALL DIMENSION AREA IN mm.
- (02) ALL THE CONCRETE SHALL BE MIXED IN PROPORTION OF M20.
- (03) ALL REINFORCING STEEL SHALL CONFORM TO TOR STEEL (A. GRADE 20) OF IS 1786-1973.
- (04) CLEAR COVER TO REINFORCING BAR SHALL BE 15mm.
- (05) IN ADDITION TO REINFORCEMENT, STEEL FIBERS SHALL BE PLACED AS PER IS 12562-2002.

HYDRAULIC ENGINEER
SUNAT MUNICIPAL CORPORATION

DETAILS OF R.C.C. PRECAST COVER

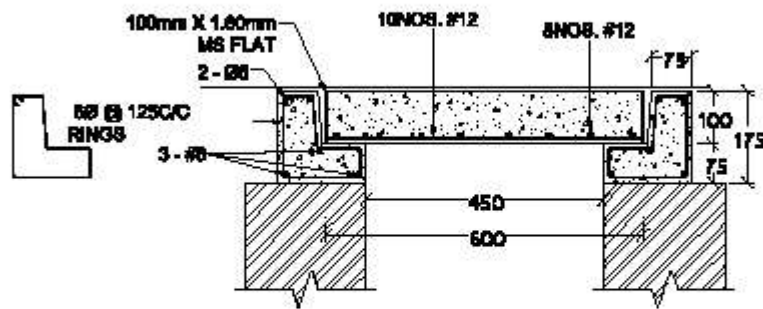

SECTION "X-X"


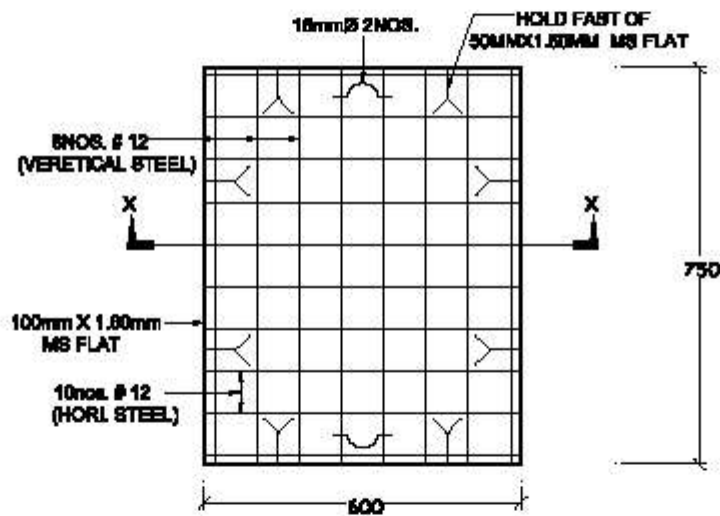


PLAN OF VALVE CHAMBER COVER

PLEASE NOTE:

- (01) ALL DIMENSION AREA IN mm.
- (02) ALL THE CONCRETE SHALL BE MIXED IN PROPORTION OF M:35.
- (03) ALL REINFORCING STEEL SHALL CONFORM TO:- TOR STEEL (B), GRADE 2nd. OF IS 1786:1978.
- (04) CLEAR COVER TO REINFORCING BAR SHALL BE 15mm.
- (05) IN ADDITION TO REINFORCEMENT, STEEL FIBERS SHALL BE PLACED AS PER IS 12582:2002.


**HYDRAULIC ENGINEER
SURAT MUNICIPAL CORPORATION**

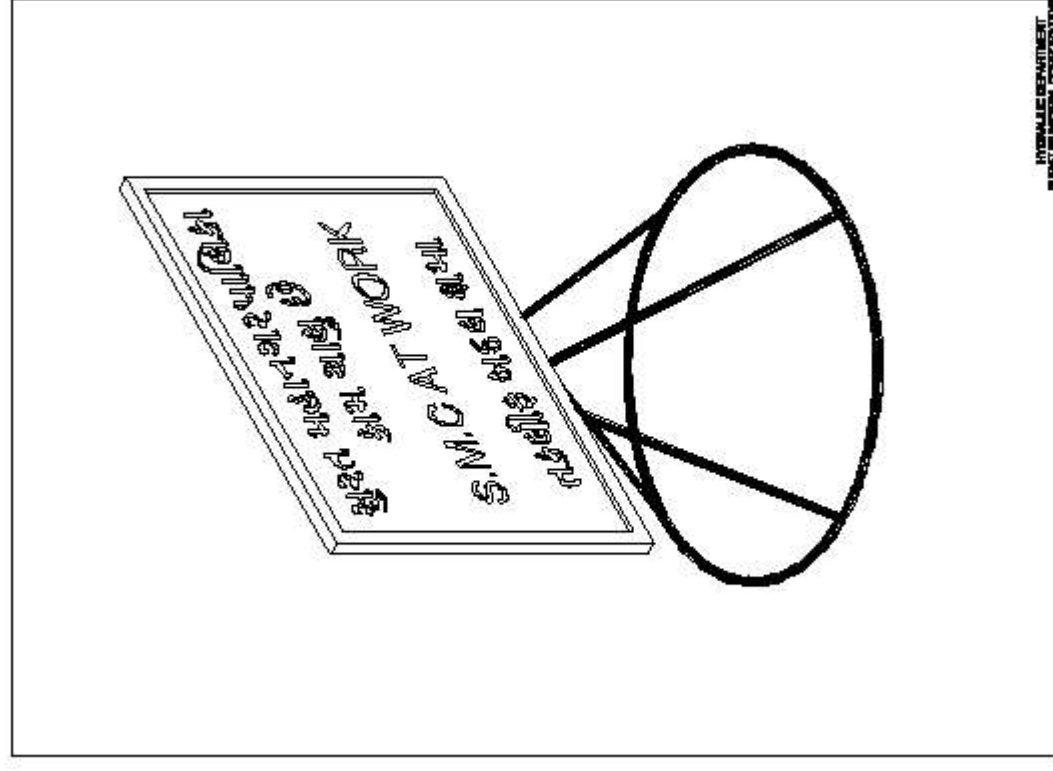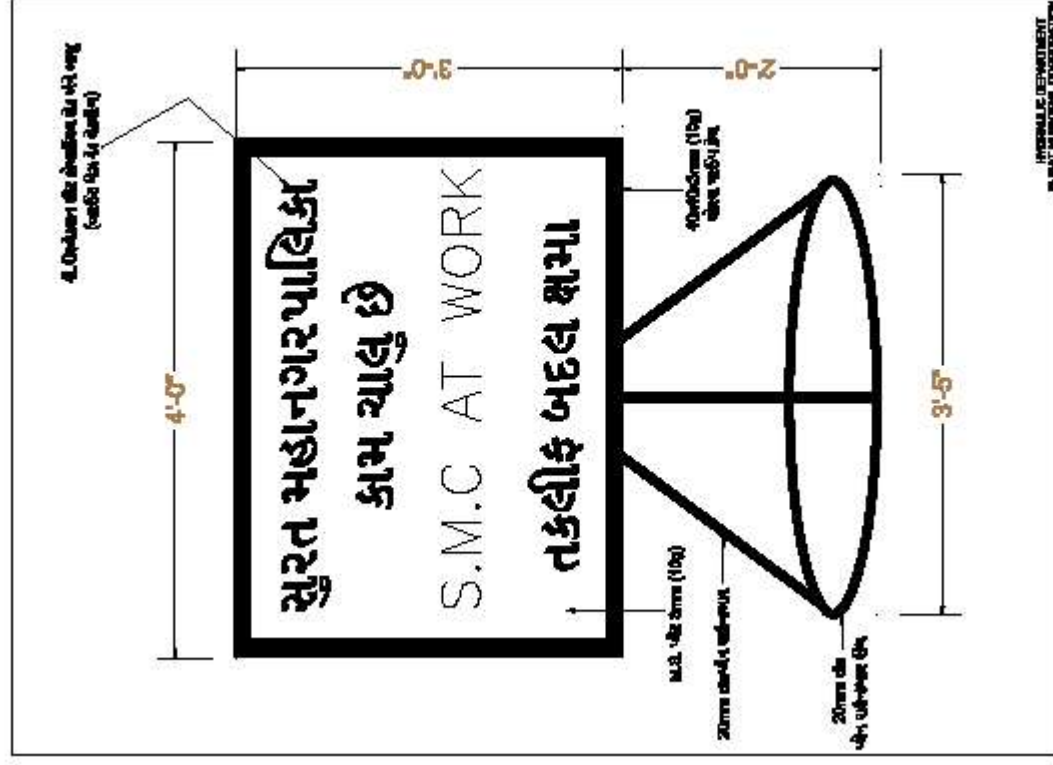



3500X3500 CHAMBER DETAIL

SCALE 1 CM=300MM

16MM² BAR @ 110MM C/C
ALT. BENT BOTHWAY

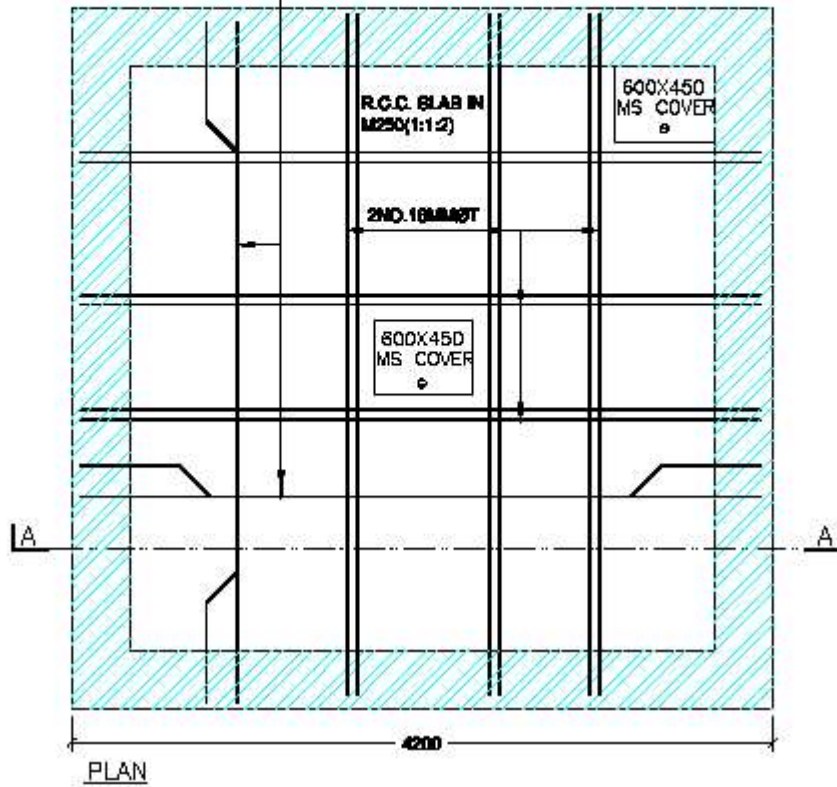

16MM² BAR @ 110MM C/C
ALT. BENT BOTHWAY

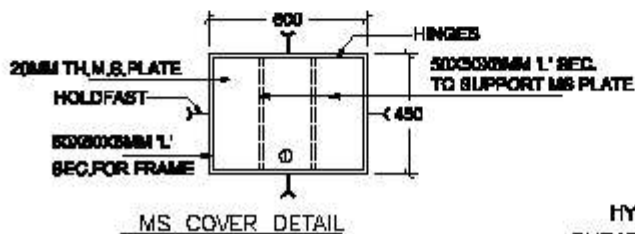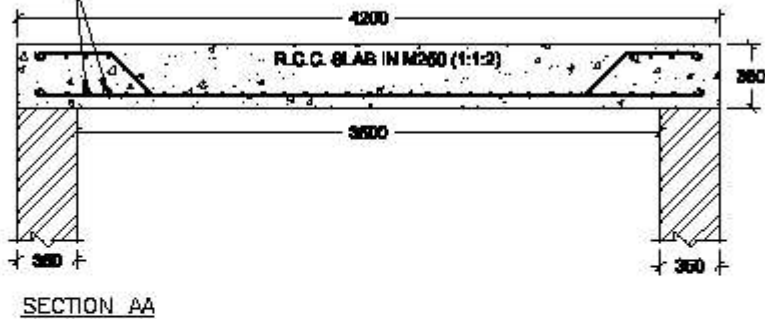

HYDRAULIC DEPARTMENT
SURAT MUNICIPAL CORPORATION